

FGard IR3

Flame detector

For hazardous industries
where fast fire detection
is critical and nuisance
alarms are not an option




FGard IR3

Multi Spectrum IR Flame Detector

The Crowcon FGard IR3 flame detector is an explosion proof multi spectrum IR flame detector. The device delivers superior performance, responding to hydrocarbon liquid fuel and gas fires at long distances.

The FGard IR3 has been independently tested to demonstrate it can detect a hydrocarbon fuel pan fire at nearly 200 feet in less than 5 seconds.

The FGard IR3 delivering superior performance in the detection of hydrocarbon fires. The FGard IR3 utilises the latest IR flame detection algorithms to ensure maximum false alarm immunity.

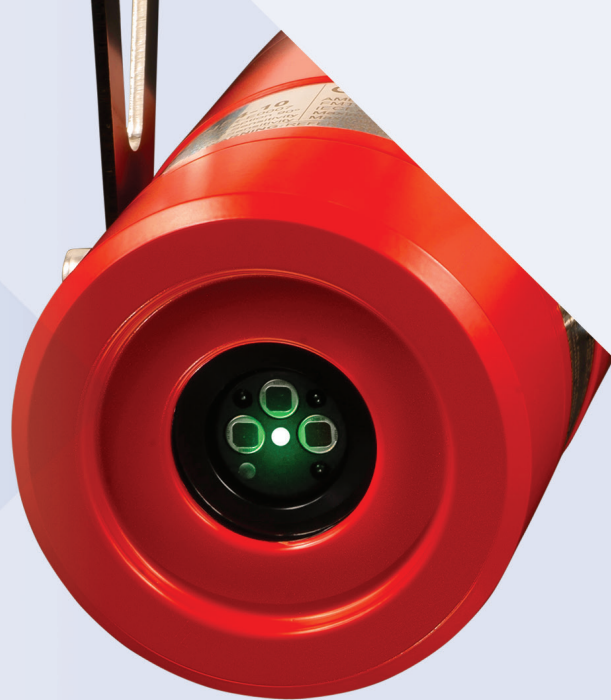

Applications

Typical applications include:

- ◆ On / Offshore Oil and Gas Processing Facilities
- ◆ Refineries
- ◆ Petrochemical Plants
- ◆ Chemical Facilities
- ◆ Pharmaceutical
- ◆ Aircraft Hangars
- ◆ Road Tunnels
- ◆ Power Generation
- ◆ Tank Farms
- ◆ Road & Rail Loading Racks
- ◆ LNG / LPG
- ◆ Warehouses / Storage Areas
- ◆ Waste Recycling / Biomass Plants
- ◆ Printing Industry



Features and benefits

- ◆ Multi Spectrum IR design delivers long detection distances and enhanced false alarm immunity
- ◆ Continuous optical test, without a reflector
 - Verifies operation and improves device up-time
- ◆ Microprocessor controlled heated optics
 - Maintains operation in harsh weather conditions (snow, ice, condensation)
- ◆ International hazardous area approvals
 - FM / ATEX / IEC Ex / INMETRO / PESO
- ◆ Certified performance testing to multiple fuels
 - FM 3260
 - EN 54-10
- ◆ Adjustable sensitivity levels
 - For application flexibility
 - Ensure detectors do not cross vote
- ◆ External testing with a long-range flame simulator
 - Minimises the need for scaffolding
- ◆ Easy integration using industry standard outputs:
 - Alarm and Fault Relays
 - 0-20mA
 - HART®, as standard
- ◆ Certified SIL 2 capable
- ◆ 5-year warranty



Accessories

- ◆ Flame simulator
- ◆ Pole mount bracket
- ◆ Retrofit mounting bracket
- ◆ Marine mounting bracket



Technical Specifications

| | |
|--------------------------|--|
| Environmental | |
| Operating Temp | -60°C to +85°C (-76°F to +185°F) |
| Storage Temp | -60°C to +85°C (-76°F to +185°F) |
| Humidity | 0-100 % RH (Non condensing) |
| Operating Voltage | 24 Vdc Nominal – (Range 18 to 32 Vdc) |
| Power Consumption | 3 W minimum (without heater), 15 W at 32 Vdc with heater on maximum. |
| Speed of Response | ~5 seconds (Typical) |
| Enclosure | |
| Dimensions | 4" Dia x 8" L (inches) 100 mm Dia x 200 mm |
| Material | Copper free aluminum or 316 stainless steel |
| Entry size | 3/4 inch NPT or M25 |
| Weight | Alu 5.5 lbs (2.5 Kg) / SS 13.2 lbs (6.0kg) |
| Outputs | Relay contacts (DPDT 2A at 30Vdc) – alarm and fault. |
| | 0-20mA, HART® |

Crowcon reserves the right to change the design or specification of the product without notice.

Flame sensitivity

| | Fuel | Fire Size | Distance |
|----------------------|-------------------------|---------------------|----------------|
| High Sensitivity | n-Heptane | 1'x1' / 30cm x 30cm | 196 feet (60m) |
| | n-Heptane + arc welding | 1'x1' / 30cm x 30cm | 196 feet (60m) |
| | Gasoline | 1'x1' / 30cm x 30cm | 196 feet (60m) |
| | Diesel | 1'x1' / 30cm x 30cm | 164 feet (50m) |
| | Crude oil (heavy fuel) | 20"x20" 0.5mx0.5m | 164 feet (50m) |
| | JP4 | 1'x1' / 30cm x 30cm | 196 feet (60m) |
| | Methane | 24" plume / 60 cm | 164 feet (50m) |
| | Ethanol | 1'x1' / 30cm x 30cm | 137 feet (42m) |
| Standard sensitivity | Methanol | 1'x1' / 30cm x 30cm | 137 feet (42m) |
| | n-Heptane | 1'x1' / 30cm x 30cm | 98 feet (30m) |
| | Gasoline | 1'x1' / 30cm x 30cm | 98 feet (30m) |
| | JP4 | 1'x1' / 30cm x 30cm | 98 feet (30m) |
| | Methane | 24" plume / 60 cm | 98 feet (30m) |
| | Ethanol | 1'x1' / 30cm x 30cm | 98 feet (30m) |

Performance approvals

FM 3260

EN 54-10

Ingress - IP66 / NEMA type 4X


Certified SIL 2 Capable - IEC 61508



Certification

Class 1 Div 1 Groups B, C, D T4
Ambient -50°C to +85°C

Class 1 Zone 1 AEx/Ex db IIC T4
Ambient -50°C to +85°C

ATEX  .1 2 G Ex db IIC T4
IECEX Ex db IIC T4
Ambient -60°C to +85°C

INMETRO Ex db IIC T4
PESO Ex db IIC T4
Ta = -60°C to +85°C



Disclaimer

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement Crowcon Detection Instruments Limited reserves the right to make product changes without notice. The products are routinely subject to a programme of testing which may result in some changes in the characteristics quoted. Technical information contained in this document or otherwise provided by Crowcon are based upon records, tests, or experience that the company believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Many factors beyond Crowcon Detection Instruments' control and uniquely within user's knowledge and control can affect the use and performance of a Crowcon product in a particular application.

As the products may be used by the client in circumstances beyond the knowledge and control of Crowcon Detection Instruments Limited, we cannot determine the relevance of these to an individual customer's application. It is the clients' sole responsibility to carry out the necessary tests to evaluate the usefulness of the products and review all applicable regulations and standards to ensure their safety of operation in a particular application.

 **CROWCON**
Detecting Gas **Saving Lives**

www.crowcon.com

Crowcon reserves the right to change the design or specification of the product without notice.
© 2021 Crowcon Detection Instruments Ltd. Copyright to some photographs held separately.